




## Rigimesh® Filter Elements

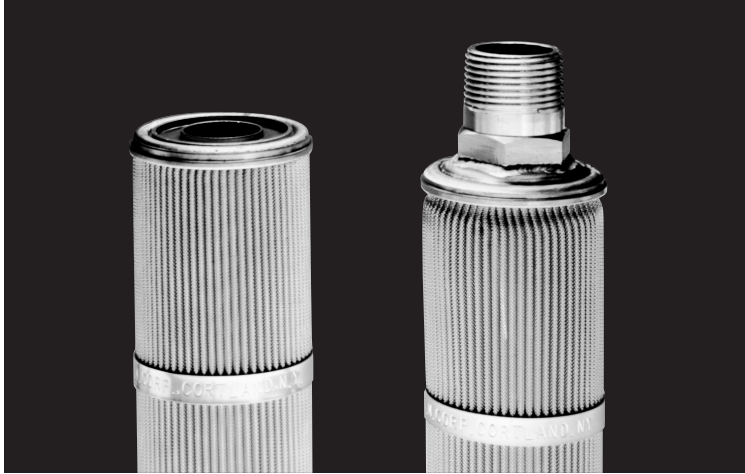

### Description

Rigimesh® porous metal filter elements are extremely permeable and are constructed of high dirt capacity stainless steel (type 304 or 316L) woven wire mesh. Rigimesh media outperform other meshes because they are *sintered* woven wire meshes with higher void space. Pall sinters the wires at their points of contact, producing an extremely strong porous material whose wires will not shift under stress and whose pore size integrity is continually maintained. This patented Pall process permits use of finer

diameter wires in manufacturing the filter medium. The net result is a filter with more pores per unit area, providing more dirt-holding capacity than that of an unsintered mesh made from coarser wires. Designs are available which are suitable for temperatures up to 600°F/315°C.

### Operating Characteristics

Standard cartridges are capable of withstanding a collapse differential of 125 psid in the forward flow (outside-in) direction and up to 600°F† and 10 psid in the reverse flow direction.

### Sizes

The standard Rigimesh filters are cylindrical forms of pleated medium, 2 ½ inches in diameter in 10 inch multiple lengths, up to 30 inches. For AB style Rigimesh filters consult the factory.

**Table I. Rigimesh Elements and Their Characteristics**

Filter Grade	Removal Ratings				Clean Pressure Drop		Recommended Flow Density	
	Liquid Service <sup>(1)</sup> Rating In $\mu\text{m}$ At % Efficiency 98%    100%		Gaseous Service <sup>(2)</sup> Weight % Removal    100% Removal ( $\mu\text{m}$ )		Liquid Service Aqueous Pressure Drop <sup>(3)</sup> psi/gpm/ft <sup>2</sup>	Gaseous Service Air Pressure Drop <sup>(4)</sup> psi/acfm/ft <sup>2</sup>	Aqueous gpm/ft <sup>2</sup>	Air acfm/ft <sup>2</sup>
Z*	1.5	15	99.92	2	0.035	0.0038	1 – 5	10 – 40
K	5	18	99.45	13	0.0073	0.0008	2 – 8	20 – 60
J	10	25	99.20	18	0.0020	0.00025	3 – 10	25 – 80
M	17	45	98.65	25	0.0015	0.00019	4 – 15	30 – 100
R	40	70	–	55	0.0006	0.00008	5 – 20	35 – 150
S	70	105	–	85	0.0004	0.00006	6 – 25	40 – 200
T	145	225	–	175	0.0003	0.00005	7 – 30	45 – 240
A	300	450	–	350	Negligible	Negligible	8 – 40	50 – 300

† Threaded connector series only. Due to seal limitations, 1000 Series suitable for applications up to 450°F.

\* Supramesh sintered powder metal and mesh composite medium.

<sup>(1)</sup> Liquid removal efficiency ratings are based on hard spherical particles.

<sup>(2)</sup> Weight percent removal data is based on AC Fine Test Dust in air. Absolute retention ratings are calculated values.

<sup>(3)</sup> Pressure drop in psi obtained by multiplying value shown by actual flow desired in gpm, viscosity of liquid in centipoise (if other than 1 cp), all divided by total filtration area (ft<sup>2</sup>) selected. See Table II for areas.

<sup>(4)</sup> Pressure drop in psi obtained by multiplying value shown by actual gaseous flow rate desired (acfm), ratio of viscosities  $\frac{\text{actual cp of gas}}{0.018}$  (viscosity of air) all divided by total filtration area (ft<sup>2</sup>) selected. See Table II for areas.

## Part Numbers / Ordering Information

### Table II. Standard Configurations of Rigimesh Elements

100% Removal Rating (µm)		Rigimesh Series Element Part Numbers		Gasket Options	● Code
Liquids	Gases	1000 Series	Threaded Element Series		
15	2	MB ■ 100 ▼ RZ ●	◆ - 24 - ▲ - ■ - RZ	Viton*	H
18	13	MB ■ 100 ▼ RK ●	◆ - 24 - ▲ - ■ - RK	Teflon*	H2
25	18	MB ■ 100 ▼ RJ ●	◆ - 24 - ▲ - ■ - RJ	Silicone	H4
45	25	MB ■ 100 ▼ RM ●	◆ - 24 - ▲ - ■ - RM	Buna-N (Std.)	H13
70	55	MB ■ 100 ▼ RR ●	◆ - 24 - ▲ - ■ - RR	Ethylene Propylene	J
105	85	MB ■ 100 ▼ RS ●	◆ - 24 - ▲ - ■ - RS	Butyl	J1
275	175	MB ■ 100 ▼ RT ●	◆ - 24 - ▲ - ■ - RT	Neoprene	J2
450	350	MB ■ 100 ▼ RA ●	◆ - 24 - ▲ - ■ - RA	Ethylene Propylene for Steam Service	J7

Nominal Length (in)	■ Code (Area (ft <sup>2</sup> ))	
	MB S	MB F
10	1.0	2.0
20	2.0	4.0
30	3.0	6.0

Nominal Length (in)	▼ Code
	1
2	
3	

Area (ft <sup>2</sup> )	◆ Code	
	P	F
1.0	1.0	-
2.0	2.0	4.0
3.0	3.0	-
4.0	-	4.0
6.0	-	6.0

Nominal Length (in)	▲ Code
	10
20	20
30	30

### Housing Information

A full selection of standard Pall industrial housings are available for Rigimesh elements. Threaded connector elements are designed to fit a special line of housings capable of a broader range of temperature (cryogenic to 800°F) and chemical service. Custom designed housings for specific applications are also available.

### Table III. Housings for Rigimesh Elements

Type of Element	Housing Available
MB ■ 100 Series	See Housing Data Sheets H1, H3-11, and H14-19.
Threaded Connector Series	See Housing Data Sheets H48, H49, and H50.

Connection	■ Code
1" NPT	4
1 1/2" NPT	6

S= 304 hardware and 304 L medium.

L= 316 hardware and 316L medium.

\* Trademark of E.I. du Pont de Nemours & Company.



25 Harbor Park Drive  
Port Washington, NY 11050  
+1 516 484 3600 telephone  
+1 800 289 7255 toll free US

### Visit us on the Web at [www.pall.com](http://www.pall.com)

Pall Corporation has offices and plants throughout the world. For Pall representatives in your area, please go to [www.pall.com/corporate\\_contact.asp](http://www.pall.com/corporate_contact.asp)

Please contact Pall Corporation for product applicability to specific National legislation and/or Regional Regulatory requirements for water and food contact use.

Because of technological developments related to the products, systems, and/or services described herein, the data and procedures are subject to change without notice. Please consult your Pall representative or visit [www.pall.com](http://www.pall.com) to verify that this information remains valid.

© Copyright 2000, Pall Corporation. Pall and are trademarks of Pall Corporation.

® Indicates a trademark registered in the USA. *Filtration. Separation. Solution.™* is a service mark of Pall Corporation.