

## CMPure CMPD Series Filter Cartridges



### Description

The CMPure CMPD advanced melt blown depth cartridges are specifically optimized for CMP slurry systems resulting in highly consistent and repeatable filter performance. CMPD filters feature our proprietary CoLD fiber melt blowing technology, which integrates Co-Located Large Diameter fibers within the fine fiber matrix to produce a rigid structural network to the cartridge. As a result, CMPD filters provide outstanding structural strength, resistance to contaminant unloading and exceptionally long service life.

- All polypropylene construction
- Continuous gradient pore structure for built-in prefiltration
- Compatible with metal (W, Cu, Al), oxide and STI slurries
- Available also as disposable filter capsules

### Specifications

#### Materials

- Medium: Polypropylene
- Core, cage and end caps: Polypropylene
- O-ring option: EPDM, Fluorocarbon elastomer

#### Removal Ratings

- 0.5  $\mu\text{m}$ , 2  $\mu\text{m}$ , 5  $\mu\text{m}$ , 10  $\mu\text{m}$ , 15  $\mu\text{m}$ , 20  $\mu\text{m}$ , 30  $\mu\text{m}$  and 50  $\mu\text{m}$

#### Configurations

- Nominal lengths: 4" / 102 mm, 10" / 254 mm, 20" / 508 mm, 30" / 762 mm, 40" / 1016 mm
- Diameter: 2.6" / 66 mm

#### Operating Conditions

- Maximum temperature: 180°F / 82°C
- Maximum differential pressure: 60 psid @ 86°F / 4 bar @ 30°C  
30 psid @ 150°F / 2 bar @ 66°C  
15 psid @ 180°F / 1 bar @ 82°C

## Part Numbers / Ordering Information

### CMPD ■ ◆ ▼ ● ▲

Code	Removal Rating (µm)
0.5	0.5
2	2
5	5
10	10
15	15
20	20
30	30
50	50

Code	Nominal Length (in / mm)
4	4 / 102
10	10 / 254
20	20 / 508
30	30 / 762
40	40 / 1016

Code	Material of Construction
U	Polypropylene

Code	Cartridge End Configuration
M3	SOE flat closed end, 222 O-rings
H21	Double open end, polypropylene and ethylene propylene co-polymer seal


Code	O-ring Material
E	EPDM
F	PTFE encapsulated fluorocarbon elastomer
V	Fluorocarbon elastomer

Due to changing formulations and process improvements in CMP, please contact Pall Microelectronics for availability of latest filtration recommendations, including < 0.5 µm depth filters and different length cartridges.

These filter cartridges are also available in disposable capsules. See specifications for the Kleen-Change In-Line Filter Capsules.

Unit conversion: 1 bar = 100 kilopascals

### Pressure Drop vs. Liquid Flow Rate<sup>1</sup>

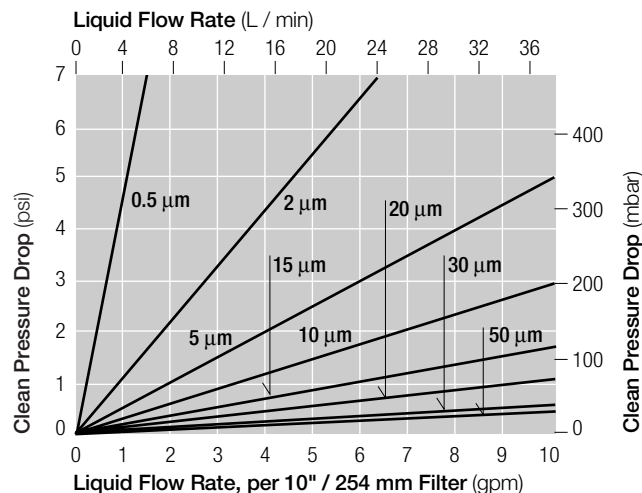

<sup>1</sup> For liquids with viscosities differing from water, multiply the pressure drop by the viscosity in centipoise.



2200 Northern Boulevard  
East Hills, New York 11548-1289 USA

+1 800 360 7255 toll free (Only in US)  
+1 516 484 5400 phone  
+1 516 625 3610 fax

Filtration. Separation. Solution.<sup>SM</sup>

Visit us on the Web at [www.pall.com/micro](http://www.pall.com/micro)

Pall Corporation has offices and plants throughout the world in locations including: Argentina, Australia, Austria, Belgium, Brazil, Canada, China, France, Germany, India, Indonesia, Ireland, Italy, Japan, Korea, Malaysia, Mexico, the Netherlands, New Zealand, Norway, Poland, Puerto Rico, Russia, Singapore, South Africa, Spain, Sweden, Switzerland, Taiwan, Thailand, United Arab Emirates, United Kingdom, United States, and Venezuela. Distributors are located in all major industrial areas of the world.

© Copyright 2007, Pall Corporation. Pall, PALL are trademarks of Pall Corporation. ® Indicates a Pall trademark registered in the USA. Filtration. Separation. Solution.<sup>SM</sup> is a service mark of Pall Corporation.