



## MICROPAK™ DF Series Filter Elements

### Coreless Filter Elements with Microfiberglass Media

- Proprietary Filter System for use with Reusable Micropak Cores
- High Surface Area for Long Service Life
- Superior Filtration Performance
- Excellent for Classifying Filtration
- Highly Consistent Microfiberglass Media
- Wide Chemical Compatibility
- Choice of Outside Netting or Hard Cage
- Polypropylene or Polyester End Caps Available
- Pressure Energized Gasket-to-Core Sealing System

### Performance Specifications

#### Filter Grades:

0.2, 0.45, 1, 3, 10, 30, 50 micron (µm)

#### Recommended Change Out Differential Pressure<sup>1</sup>:

35 psid (2.4 bard)

#### Maximum Operating Temperature:

Polypropylene end caps and netting = 180°F (82°C)

Polyester end caps and netting = 200°F<sup>2</sup> (93°C)

### Product Specifications

#### Materials of Construction:

##### Filter Media:

50 µm	Spunbonded Polyester
All Other Grades	Borosilicate Microfiberglass with Acrylic Binder

Netting (standard): Polypropylene or Polyester

Cage (optional): Polypropylene

End Caps: Polypropylene or Polyester

Support Material: Spunbonded Polyester

Sealing: Thermal Bond

Gaskets: Silicone Elastomer, Buna N, EPDM, Viton<sup>3</sup> A

#### Dimensions (nominal):

Outside Diameter: 2 3/8" (6.6 cm)

Lengths: 9 3/4" (24.8 cm), 10" (25.4 cm),  
19 1/2" (49.5 cm), 20" (50.8 cm),  
29 1/4" (74.3 cm), 30" (76.2 cm),  
39 1/2" (100.3 cm), 40" (102 cm)




<sup>1</sup> - Provided that the maximum differential pressure is not exceeded based on temperature limits defined above.

<sup>2</sup> - Non-aqueous environment. For complete chemical/thermal compatibility information, consult your Pall representative.

<sup>3</sup> - Registered trademark of DuPont Dow Elastomers.

## Typical Flow vs. Differential Pressure for Application Sizing

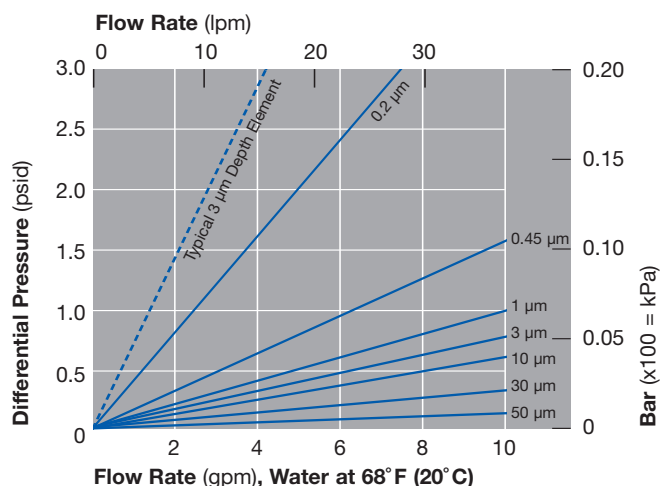

Flow rate is per 10" (25.4 cm) element. For liquids other than water, multiply differential pressure by fluid viscosity (cP).

## Particle Retention (µm)

Element Designation	Liquid Service	Absolute (>99.9% Efficiency)	Gas Service
	90% Efficiency		DOP Retention
MPDF 0.2	0.2	1	99.999%
MPDF 0.45	0.45	2	99.998%
MPDF 1	1	4	96%
MPDF 3	3	10	
MPDF 10	10	18	
MPDF 30	30	45	
MPDF 50	50	75	

Liquid removal ratings are based on Pall's Dynamic Efficiency test protocol. This single pass, destructive challenge test is based on ASTM F795 test procedures for determining the performance of a filter medium.

## Part Numbers/Ordering Information

MPDF ■ – ● ◆ ▼ ▽ (e.g., MPDF 3-10NEE)

Code ■	Filter Grades	Code ●	Element Lengths (nominal)
0.2	0.2 µm	9.75	9.75"
0.45	0.45 µm	10	10"
1	1 µm	19.5	19.5"
3	3 µm	20	20"
10	10 µm	29.25	29.25"
30	30 µm	30	30"
50	50 µm	39.5	39.5"
		40	40"

Code ◆	Gasket Materials
S	Silicone
E	EPDM
N	Buna N
V	Viton A

Code ▼	End Cap Materials
U	Polypropylene
E	Polyester

Code ▽	Netting/Cage Materials
U	Polypropylene
E	Polyester
C	Cage (Polypropylene only)



2200 Northern Boulevard.  
East Hills, New York 11548-1289

1.800.FILTERS toll free  
516.484.5400 phone  
516.484.3216 fax  
www.pall.com web

Visit us on the Web at [www.pall.com](http://www.pall.com)

Pall Corporation has offices and plants throughout the world in locations including: Argentina, Australia, Austria, Belgium, Brazil, Canada, China, France, Germany, India, Indonesia, Ireland, Italy, Japan, Korea, Malaysia, Mexico, the Netherlands, New Zealand, Norway, Poland, Puerto Rico, Russia, Singapore, South Africa, Spain, Sweden, Switzerland, Taiwan, Thailand, United Kingdom, United States, and Venezuela. Distributors are located in all major industrial areas of the world.