

# Oenoflow™ PRO XL-S Crossflow Microfiltration System

## Description

The Oenoflow PRO XL-S systems are specifically designed to meet the needs and requirements of mid-sized wineries. Clarification is achieved in a single process step without the need for filter aids, centrifugation or significant impact on the organoleptic characteristics of the wine. By increasing yields, reducing waste volumes and maintaining more consistent filtrate quality, the fully automated systems provide a cost saving sustainable alternative to traditional wine clarification methods.




The systems utilize Pall's proven hollow fiber membranes with unique mechanical strength and excellent chemical resistance which allow high productivity and repeated exposure to aggressive cleaning regimes. The large surface area modules enable manufacture of compact systems with low water and chemical consumption in line with winery conservation programs.

The Oenoflow PRO XL-S system utilizes Pall's proprietary Optimizer algorithm that analyzes production data and automatically adjusts operating parameters in real time to maximize system efficiency. This feature can deliver significant savings in operating expense (OPEX). The system is connected to Pall servers which allows the user easy access to their data through Pall's Oenoflow PRO app or browser portal.



Oenoflow PRO XL-S System

With adjustable operating cycles, Pall's proprietary Low Concentration Volume (LCV) option, and automatic chemical dosing, the Oenoflow PRO XL-S system is the smart solution for reliable and economical wine clarification. Additionally the small batch program provides the flexibility required by most modern wine cellars, packagers and mobile bottlers.

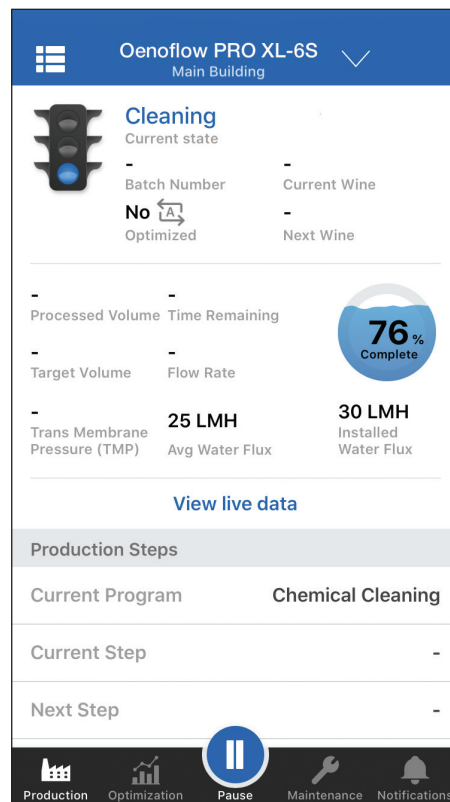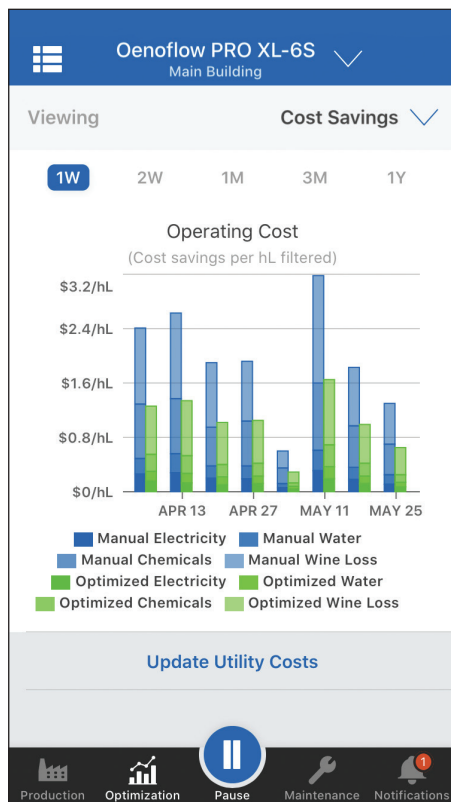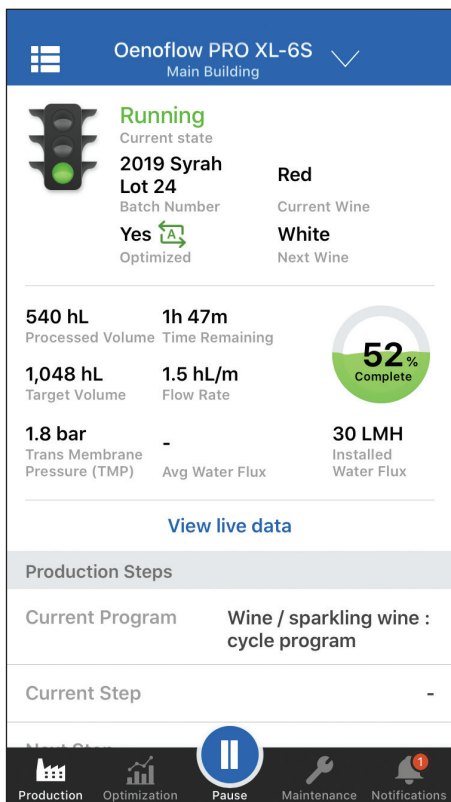

## Cost Saving Benefits

The Oenoflow PRO XL-S systems incorporate unique features which enable wineries to perform clarification at low operating costs while maintaining wine quality. These include:

- PVDF membranes with high mechanical strength for longer service life
- Optimizer algorithm to minimize OPEX
- High area, high flow modules for more compact and more economical systems
- Back pulse capability for increased system productivity
- Transparent module housings to confirm filtrate quality and enhance troubleshooting capabilities
- Fully automated working cycles for unattended operation and reduced labor and downtime
- On board concentration and filtrate tanks for operation independent of winery conditions
- Proprietary LCV option for high wine yield
- Small batch program isolating 1 module for efficient processing of batches up to 1000 L
- Water “solo” back flushes for highly effective solids removal
- Automated chemical dosing for safe and easy cleaning

## Oenoflow PRO XL-S System Components

The Oenoflow PRO XL-S systems are fully automated, modular systems available with 3 up to 6 crossflow filtration modules. All metal wetted parts are 304 Stainless steel. The piping manifold, membranes, pumps and instruments are mounted on a mobile frame which includes the following:

- Stainless steel pre-filter screen for large particles
- On board concentration/cleaning tank
- Feed pump
- Circulation pump
- Filtrate reservoir
- Filtrate/back flush pump
- Magnetic flow meter with batch control

- CIP system with 1 micron, 30 inch water filter and temperature control
- Automatic chemical dosing with 3 supply inlets
- Touch screen PLC
- Pressure, temperature and dry run protection
- A power jack for an external transfer pump

## Oenoflow XL Membranes

The Oenoflow PRO XL-S modules incorporate Pall's proven symmetric hollow fiber membranes. The large diameter, high flow modules with 21.5 square meters of filter area, have at least twice the filter area of typical competitive hollow fiber modules. The module components include:

Membrane:	PVDF
Potting:	Epoxy resin
Sleeve:	Polypropylene
Housing:	Transparent polysulfone
Seals:	Ethylene Propylene copolymer


## Oenoflow PRO XL-S Standard Options

The following options are available for additional supply:


- LCV with small batch program
- Nitrogen purge and blanketing
- Spray ball kit for T1
- External bleed
- Manual dual pre-filter screens
- External transfer pump<sup>1</sup>
- Tele-service adaptor
- Stainless steel dummy modules for future expansion capacity
- High Pressure (HP) option for treatment of sparkling wine under isobaric conditions
- Conductivity meter

<sup>1</sup>This option is supplied as an external equipment option mounted on its own mobile frame.

Front view

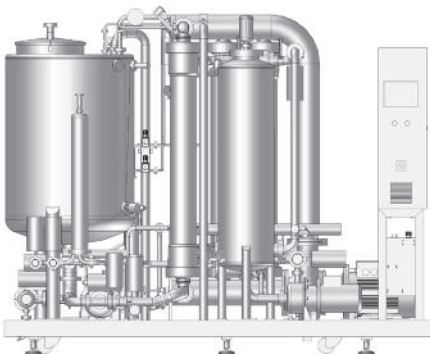


Left side view

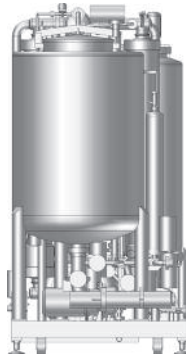

Right side view



Rear view

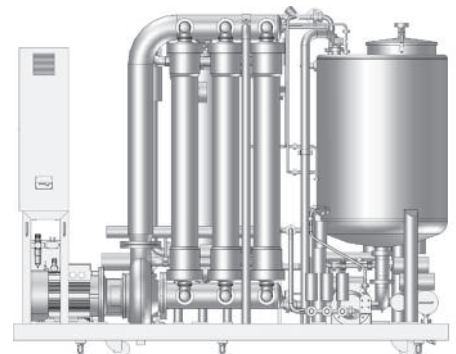

## Compliance

The Oenoflow PRO XL-S systems are CE to demonstrate compliance with relevant regulations including the European Pressure Directives.

Various Oenoflow modules have been qualified for compliance to specific regulatory standards for products coming into contact with foodstuffs. Please contact Pall for details.

## Operating Conditions

### Wine Filtration

Inlet pressure: 0.5 bar to 3.5 bar (7 psi to 50 psi)

Temperature: -4 °C to 25 °C (24 °F to 77 °F)

Maximum temperature for cleaning: 65 °C (150 °F)

## Standard Filtration Skid Specifications

Model	No. of modules	Filter Area (m <sup>2</sup> )	Average flow rate <sup>2</sup>	Length	Width	Height	Weight (empty)
Oenoflow XL-3S	3	64.5	30 - 45 hl/h (790 - 1190 gph)	2.60 m (8.53 ft)	1.20 m (3.94 ft)	2.15 m (7.05 ft)	1420 kg (3130 lbs)
Oenoflow XL-4S	4	86	40 - 60 hl/h (1050 - 1580 gph)	2.70 m (8.86 ft)	1.20 m (3.94 ft)	2.15 m (7.05 ft)	1550 kg (3417 lbs)
Oenoflow XL-5S	5	107.5	50 - 75 hl/h (1320 - 1980 gph)	3.00 m (9.84 ft)	1.20 m (3.94 ft)	2.15 m (7.05 ft)	1590 kg (3505 lbs)
Oenoflow XL-6S	6	129	60 - 90 hl/h (1580 - 2380 gap)	3.00 m (9.84 ft)	1.20 m (3.94 ft)	2.15 m (7.05 ft)	1690 kg (3725 lbs)

<sup>2</sup> The flow rates for the various Oenoflow XL models are averages for the complete filtration cycle, and dependent on the wine characteristics and pre-treatment.



Pall Corporation

### Pall Food and Beverage

New York – USA

+1 516 484 3600 telephone

+1 866 905 7255 toll free

foodandbeverage@pall.com




Better Lives.  
Better Planet.

### Visit us on the Web at [www.pall.com/foodandbev](http://www.pall.com/foodandbev)

Pall Corporation has offices and plants throughout the world. For Pall representatives in your area, please go to [www.pall.com/contact](http://www.pall.com/contact)

Please contact Pall Corporation to verify that the product conforms to your national legislation and/or regional regulatory requirements for water and food contact use.

Because of technological developments related to the products, systems, and/or services described herein, the data and procedures are subject to change without notice. Please consult your Pall representative or visit [www.pall.com](http://www.pall.com) to verify that this information remains valid.

© Copyright 2020, Pall Corporation. Pall, , and Oenoflow are trademarks of Pall Corporation. ® Indicates a trademark registered in the USA. Better Lives. Better Planet. and Filtration. Separation. Solution.<sup>SM</sup> are service marks of Pall Corporation.