




Pall Corporation

Small Capsule Filter



Pall Ink Jet Team



Filtration. Separation. Solution.SM

IJ 1768A



Compact, self-contained filter assemblies for use in Digital Printing systems

The Pall® Small Capsule Filter (SCF) is a compact filter assembly designed for the needs of equipment OEMs where fine filtration and low hold-up volumes are critical.

This capsule features a high-area pleated filter construction for long service life and low initial pressure drop, ideal for situations where space is at a premium. In addition to the standard polypropylene capsule, an opaque UV resistant capsule in polypropylene is also available.

Description

- The SCF assemblies are absolute-rated filter capsules for ink jet ink filtration on Digital Printing systems.
- No binders, adhesives or mold release agents are employed in the manufacture of this product.
- The SCF assemblies feature **Pall** HDC® II polypropylene filter media. (Reference USD1295 literature for further details). Other media options are available upon request.
- The inlet and outlet connections are heavy-duty female luer lock connectors.

Features

- Absolute* rated filter media
- Compact design
- Luer lock connections
- Self-contained assembly
- Opaque capsule option
- Pleated element construction
- All-polypropylene construction
- Housing constructed of UL-recognised polypropylene

Advantages

- Consistent filter effluent
- Low hold-up volume
- Easy, quick filter change
- No need for separate filter housing
- Light does not penetrate capsule
- High effective filter area in small envelope size
- Low extractables in most ink systems
- Meets requirements for UL label

Benefits

- Maximum printhead protection without pigment stripping
- Minimum ink waste during filter changes
- Minimum ink loss and down time
- Lower total cost of filtration
- Reduced curing of UV-sensitive materials
- Low clean pressure drop and long service life
- Good compatibility and will not affect ink properties
- Satisfactory for use inside printing equipment



Technical Information


Materials of Construction

Filter Media	Melt-blown polypropylene
Shell	UL-recognised polypropylene
Core, Cage and Endcaps	Polypropylene

Operating Conditions


Maximum Operating Pressure	60 psig @ 32-120°F 4 barg @ 0-50°C
Maximum Differential Pressure	40 psid 2.75 bard

Typical Flow Rate versus Differential Pressure ⁽¹⁾

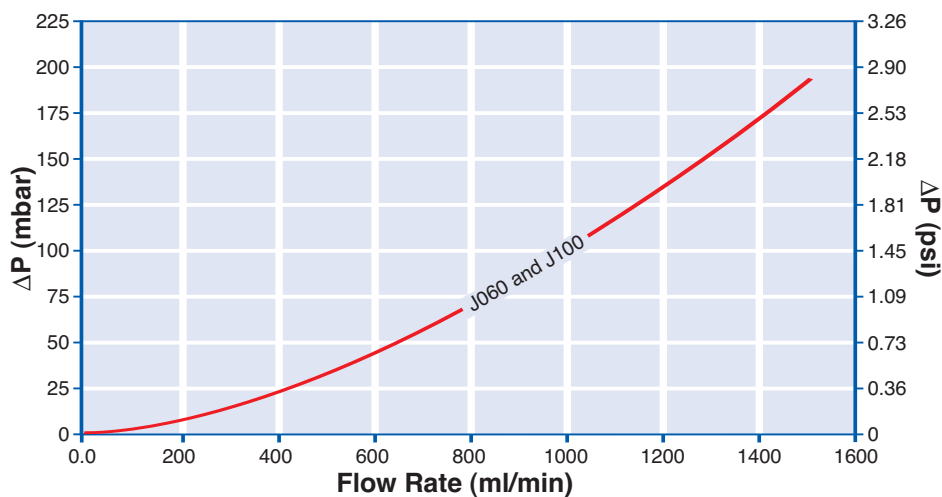

⁽¹⁾ For fluids of 1 cP viscosity. As a general guide, for other viscosities, multiply differential pressure by viscosity in cP.

Dimensional Drawing

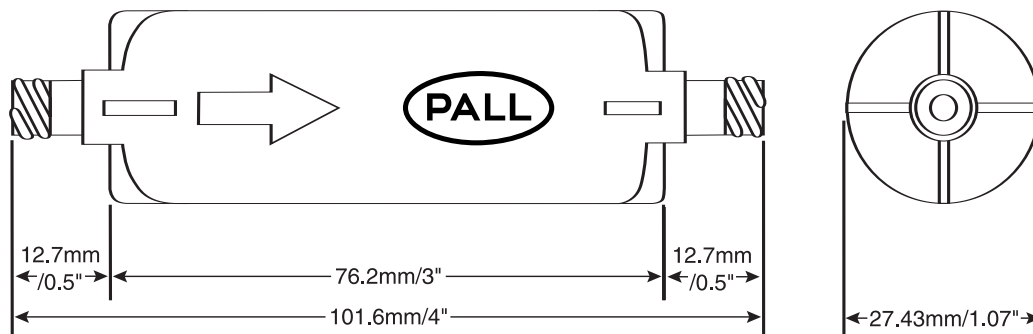



Ordering Information

(This is a guide to the part numbering structure only. For availability of specific options, please contact Pall)

S C F 3 1 1
 Table 1 Table 2

Table 1

Code	Capsule
1	Standard
2	UV resistant (black)

Table 2

Code	Removal Rating*
J060	6µm
J100	10µm

* Based on the modified OSU-F2 test in water



Pall Corporation

Pall Microelectronics

New York - **USA**

800.360.7255 toll free
 +1 516 484 5400 telephone
 +1 516 625 3610 fax

Portsmouth - **UK**

+44 (0)23 9230 2374 telephone
 +44 (0)23 9230 2509 fax
 processuk@pall.com

Visit us on the web at www.pall.com

Pall Corporation has offices and plants throughout the world in locations including: Argentina, Australia, Austria, Belgium, Brazil, Canada, China, France, Germany, Hong Kong, India, Indonesia, Ireland, Italy, Japan, Korea, Malaysia, Mexico, the Netherlands, New Zealand, Norway, Poland, Puerto Rico, Russia, Singapore, South Africa, Spain, Sweden, Switzerland, Taiwan, Thailand, United Kingdom, United States, and Venezuela. Distributors are located in all major industrial areas of the world.

Because of developments in technology these data or procedures may be subject to change. Consequently we advise users to review their continuing validity annually. Part numbers quoted above are protected by the Copyright of Pall Europe Limited.

® Pall and HDC are trade marks of Pall Corporation.
 Part numbers quoted above are protected by the Copyright of Pall Europe Ltd.
 ® indicates a Pall trade mark registered in the USA.
 Filtration. Separation. Solution is a service mark of Pall Corporation.
 ©2003, Pall Europe Limited.

Filtration. Separation. Solution.SM