

# Gaskleen® IV Series Filter Assembly (1.5 nm)



Data Sheet MEGK4ENa

## Description

The Gaskleen® IV Series Filter Assembly is specifically designed for  $\geq 1.5$  nanometers ( $0.0015 \mu\text{m}$ ) filtration of ultra-high purity semiconductor process gases.

This assembly provides additional features over those normally associated with all fluoropolymer element point-of-use process gas filters. These include:

## Features & Benefits

- No downstream (wetted surface) weld
- No elastomeric seals
- Rotatable VCR<sup>1</sup> nuts for ease of installation
- Excellent gas displacement characteristics (low internal volume)
- High purity 316L stainless steel electropolished housing
- All fluoropolymer element
- High temperature and pressure capabilities
- Compact size (1.13" / 28.8 mm dia.) for ease of installation
- 100% integrity tested
- Cleanroom manufactured and packaged

## Specifications

Filter Medium	PTFE
Support	TFE / FEP
Core and End Caps	PFA 440HP
O-ring	none
Internal Surface Finish	$\leq 7 \mu\text{in} / 0.18 \mu\text{m R}_a$
Housing	Electropolished 316L stainless steel VAR PLUS housing meets or exceeds typical VIM / VAR specifications
Removal Rating <sup>2</sup>	$\geq 1.5 \text{ nm}$ $< 10 \text{ ppb}$ moisture contribution (Qualified per SEMASPEC test method #90120397B-STD)
Preconditioned Cleanliness	$< 10 \text{ ppb}$ THC contribution (Qualified per SEMASPEC test method #90120396B-STD) $< 10 \text{ ppb}$ O <sub>2</sub> contribution (Qualified per SEMASPEC test method #90120398B-STD) $< 1 \text{ particle}/(\text{ft}^3)$ contribution above background
Connections	1/4" Gasket seal, male (VCR or compatible)
	1/4" Butt Weld (0.035" / 0.89 mm wall)
	3/8" Gasket Seal, male (VCR or compatible)
	3/8" Butt Weld (0.035" / 0.89 mm wall)
	1/2" Butt Weld (0.049" / 1.24 mm wall)




Leak Rating	100% helium leak tested to $10^{-9} \text{ atm}\cdot\text{cm}^3/\text{s}$ Design validated to $10^{-11} \text{ atm}\cdot\text{cm}^3/\text{s}$
Maximum Operating Pressure	750 psig @ 284 °F / 52 bar @ 140 °C
Maximum Forward Differential Pressure	100 psid @ 100 °F / 7 bar @ 38 °C
Maximum Reverse Differential Pressure	50 psid @ 100 °F / 3.5 bar @ 38 °C
Packaging	Double bagged Outer bag: aluminized mylar <sup>3</sup> Inner bag: polyethylene N <sub>2</sub> purged
EU Pressure Equipment Directive	Assemblies have been evaluated and designed using SEP per the European Union's Pressure Equipment Directive 2014 / 68 / EU and are not CE marked.

<sup>1</sup> VCR is a trademark of Swagelok Co.

<sup>2</sup> Particle rating based on laboratory testing with NaCl aerosol.


<sup>3</sup> Mylar is a registered trademark of Dupont Teijin Films.

## Pressure Drop vs. Gas Flow Rate<sup>4</sup>

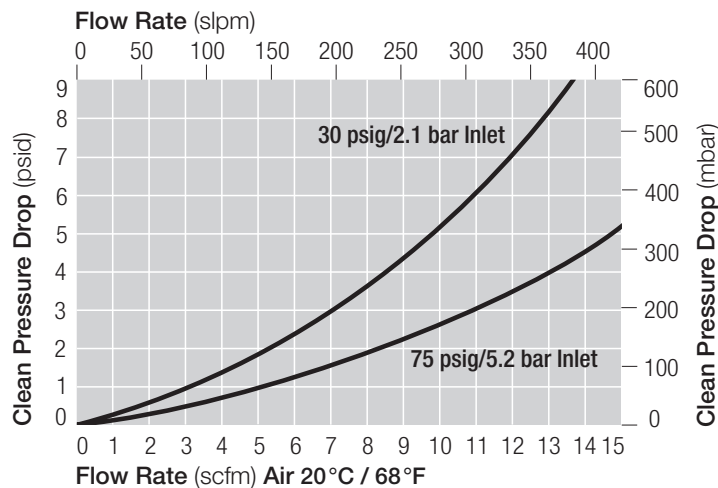


<sup>4</sup> For 1/4" connections

## Dimensions

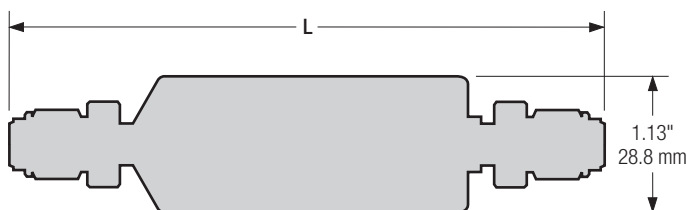

VCR Connection

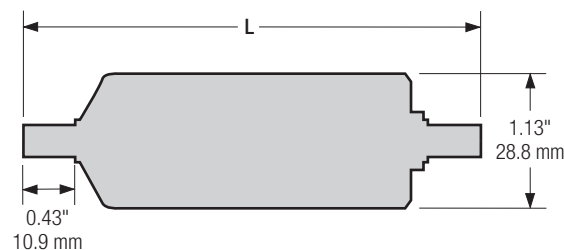

Butt Weld Connection

## Part Numbers / Ordering Information

Part Number	Description	Length (L) (in / mm)
SGLFPF6402VMM4	1/4" Gasket Seal, (VCR or Compatible) Male Inlet / Male Outlet	5.00 / 127
GLFPF6402BW4	1/4" Butt Weld, 0.035" / 0.89 mm wall	3.87 / 98
SGLFPF6402VMM6 / 8	3/8" or 1/2" Gasket Seal, (VCR or Compatible) Male Inlet / Male Outlet	5.00 / 127
GLFPF6402BW6	3/8" Butt Weld, 0.035" / 0.89 mm wall	3.87 / 98
GLFPF6402BW8	1/2" Butt Weld, 0.049" / 1.24 mm wall	3.87 / 98

Unit conversion: 1 bar = 100 kilopascals



### Microelectronics

25 Harbor Park Drive  
Port Washington, NY 11050  
+1 516 484 3600 telephone  
+1 800 360 7255 toll free US

### Nihon Pall Ltd.

6-5-1, Nishishinjuku,  
Shinjuku-ku  
Tokyo 163-1325 Japan  
+81 3 6901 5700 telephone  
+81 3 5322 2109 fax

Pall Corporation has offices and plants throughout the world. To locate the Pall office or distributor nearest you, visit [www.pall.com/contact](http://www.pall.com/contact).

The information provided in this literature was reviewed for accuracy at the time of publication. Product data may be subject to change without notice. For current information consult your local Pall distributor or contact Pall directly.

IF APPLICABLE Please contact Pall Corporation to verify that the product conforms to your national legislation and/or regional regulatory requirements for water and food contact use.

© Copyright 2025, Pall Corporation. Pall, , and Gaskleen are trademarks of Pall Corporation.® Indicates a trademark registered in the USA.