

# Gaskleen® Light Series Filter Assemblies (1.5 nm)



Data Sheet MEGLEND

## Description

Gaskleen Light filter assemblies have been designed specifically to provide the high-purity gas filtration required in solar cell and liquid crystal display manufacturing. The assemblies are available in two styles: the TFA3 has a high-flow, compact design, for use where space is limited; the TFA6 is designed for applications where higher flow capacity is desired.

## Features & Benefits

- 316L stainless steel electropolished housing
- All-fluoropolymer filter cartridge
- High temperature and pressure capabilities
- 100% integrity tested
- Cleanroom manufactured and packaged
- 100% helium leak tested
- Minimized packaging reduces waste while maintaining product purity



## Specifications

Filter Medium		PTFE
Support	TFA3	None
	(S)TFA6	Fluoropolymer
Core and End Caps		PFA
O-ring	TFA3	FEP encapsulated fluorocarbon
	(S)TFA6	None
Removal Rating <sup>1</sup>		≥ 1.5 nm
Connections		1/4", 1/2" or 3/4" gasket seal (VCR <sup>2</sup> or compatible)
		1/4", 3/8" or 1/2" compression fittings
Leak Rating		100% helium leak tested to 10 <sup>-9</sup> atm-cm <sup>3</sup> /s


<sup>1</sup> Particle rating is based on laboratory testing with NaCl aerosol.

<sup>2</sup> VCR is a registered trademark of Swagelok Company


Maximum Operating Pressure	TFA3	20.7 MPa at 122 °C / 3,000 psig at 250 °F
	(S)TFA6	5.2 MPa at 140 °C / 750 psig at 284 °F
Maximum Allowable Forward Differential Pressure	TFA3	0.6 MPa at 21 °C / 80 psid at 70 °F
	(S)TFA6	0.7 MPa at 20 °C / 100 psid at 68 °F
Maximum Allowable Reverse Differential Pressure	TFA3	0.3 MPa at 21 °C / 50 psid at 70 °F
	(S)TFA6	0.3 MPa at 20 °C / 50 psid at 68 °F
EU Pressure Equipment Directive	TFA3	Assemblies have been evaluated and designed using SEP per the European Union's Pressure Equipment Directive 2014/68/EU and are not CE marked.
	(S)TFA6	Assemblies have been evaluated for compliance with the European Union's Pressure Equipment Directive 2014/68/EU and are CE marked.

## Pressure Drop vs. Gas Flow Rate


**TFA3VMM4**

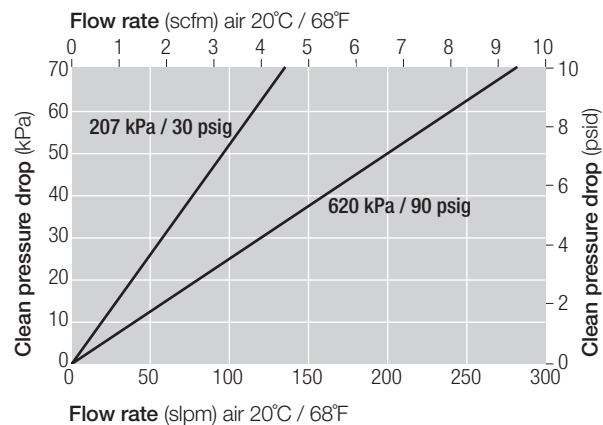


**TFA6VMM4 / STFA6SM4**

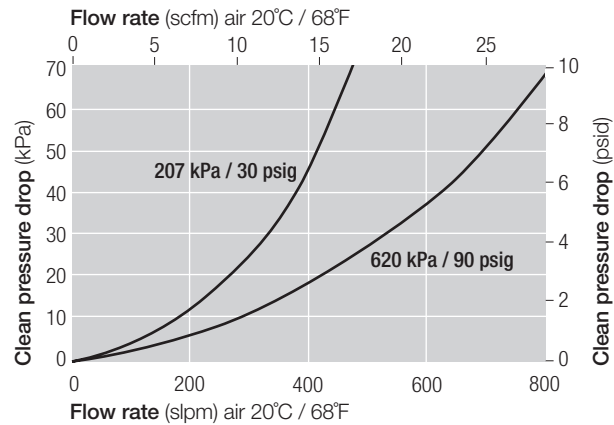

**TFA3VMM68EL**

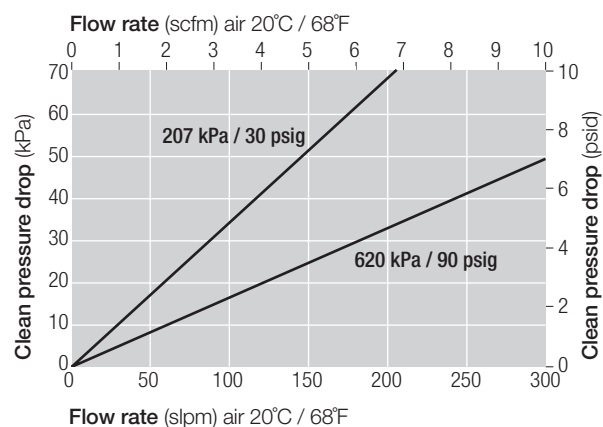


**TFA6VMM8 / TFA6VMM12 / STFA6SM8**

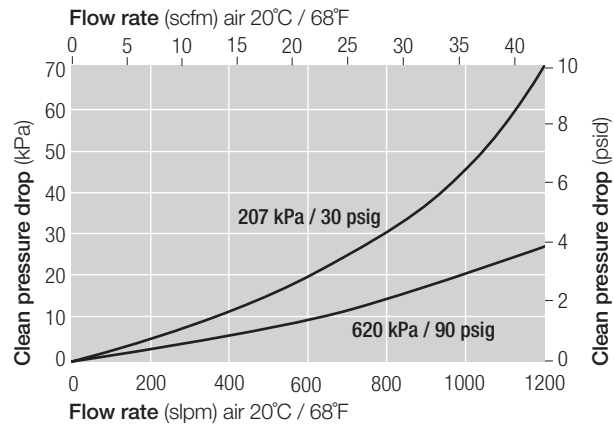


## Dimensions

**TFA3**

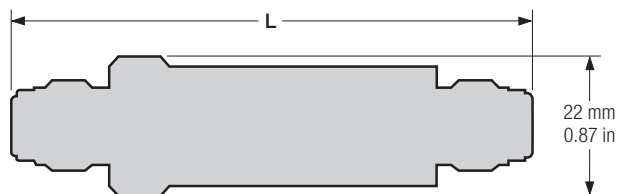

**TFA6 / STFA6**

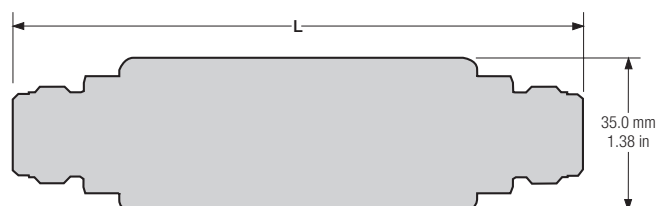

## Part Numbers / Ordering Information

Part Number	Description	Nominal Length (L) (mm / in)
TFA3VMM4	¼" gasket seal, (VCR or compatible) male / male	84 / 3.31
TFA3VMM68EL	⅜" or ½" gasket seal, (VCR or compatible) male / male	127 / 5
TFA6VMM4	¼" gasket seal, (VCR or compatible) male / male	127 / 5
TFA6VMM8	½" gasket seal, (VCR or compatible) male / male	127 / 5
TFA6VMM12	¾" gasket seal, (VCR or compatible) male / male	140 / 5.5
STFA6SM4	¼" compression seal, (Swagelok or compatible) male / male	113 / 4.4
STFA6SM6	⅜" compression seal, (Swagelok or compatible) male / male	118 / 4.6
STFA6SM8	½" compression seal, (Swagelok or compatible) male / male	119 / 4.7

Unit conversion: 100 kilopascals = 1 bar



### Microelectronics

25 Harbor Park Drive  
Port Washington, NY 11050  
+1 516 484 3600 telephone  
+1 800 360 7255 toll free US

### Nihon Pall Ltd.

6-5-1, Nishishinjuku,  
Shinjuku-ku  
Tokyo 163-1325 Japan  
+81 3 6901 5700 telephone  
+81 3 5322 2109 fax

Pall Corporation has offices and plants throughout the world. To locate the Pall office or distributor nearest you, visit [www.pall.com/contact](http://www.pall.com/contact).

The information provided in this literature was reviewed for accuracy at the time of publication. Product data may be subject to change without notice. For current information consult your local Pall distributor or contact Pall directly.

*IF APPLICABLE* Please contact Pall Corporation to verify that the product conforms to your national legislation and/or regional regulatory requirements for water and food contact use.

© Copyright 2025, Pall Corporation. Pall, , and Gaskleen are trademarks of Pall Corporation.® Indicates a trademark registered in the USA.