

Gaskleen[®]™ Filter Assembly

1 1/8" C-Seal (1.5 nm)



Data Sheet MEGTMCENC

Description

Pall's Gaskleen[®]™ filter assemblies are designed for ≥ 1.5 nm filtration of semiconductor process gases. The top mount filter is ideally suited for integrated gas delivery systems, providing easy access and changeout.

Features & Benefits

- 316L stainless steel housing
- State-of-the-art filter medium
- High temperature and pressure capabilities.
- Excellent gas displacement and desorption characteristics
- 100 % helium leak tested
- Manufactured and packaged in a cleanroom environment




Specifications

Filter Medium	GTMF1013CC4	316L stainless steel
	GTMF3700CC4	
	GTMN1013CC4	Nickel
	GTMP3101CC4	PTFE
Core and End Caps (GTMP3101CC4)	PFA	
O-ring (GTMP3101CC4)	FEP encapsulated fluorocarbon	
Internal Surface Finish	$\leq 5 \mu\text{in } R_a / 0.13 \mu\text{m}$	
Internal Housing Surface Chmistry	Cr:Fe (1:1) chromium-enriched	
Housing	316L stainless steel	
	Housing material meets or exceeds VIM / VAR specifications	
Removal Rating	≥ 1.5 nm	
Particle Removal Characteristics	GTMF1013CC4	10^9 particle reduction up to 5 slpm
	GTMN1013CC4	10^9 particle reduction up to 3 slpm
	GTMP3101CC4	10^9 particle reduction up to 75 slpm
	GTMF3700CC4	10^9 particle reduction up to 100 slpm


Connections	C-Seal, 1 1/8" interface
Leak Rating	100% helium leak tested to 10^{-9} atm cm^3/s Design validated to 10^{-11} atm cm^3/s
Design Pressure (Maximum Operating Pressure)	3.5 MPa @ 100 °C / 500 psig @ 212 °F
Maximum Allowable Differential Pressure	GTMF1013CC4 / GTMN1013CC4 / GTMF3700CC4 0.7 MPa @ 38 °C / 100 psid @ 100 °F
	GTMP3101CC4 0.6 MPa @ 121 °C / 80 psid @ 250 °F
EU pressure Equipment Directive	Assemblies have been evaluated and designed using SEP per the European Union's Pressure Equipment Directive 2014/68/EU and are not CE marked.

Pressure Drop vs. Air Flow Rate (20 °C / 68 °F)


GTMF1013CC4

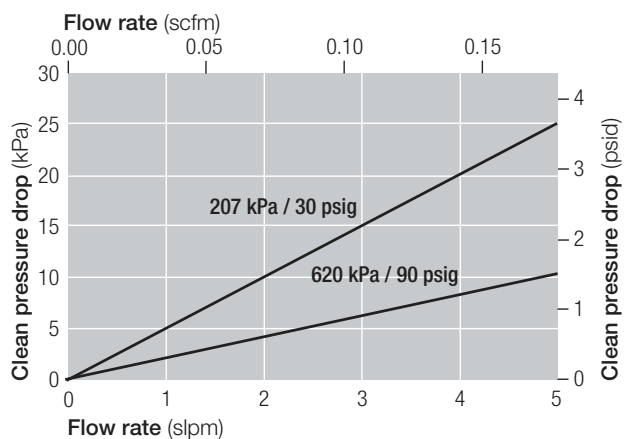


GTMN1013CC4

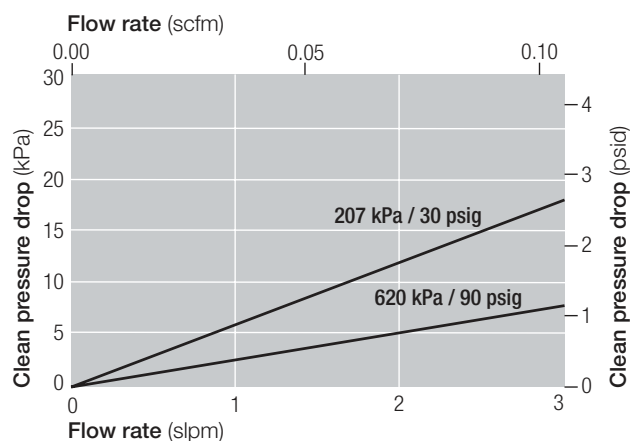


GTMP3101CC4

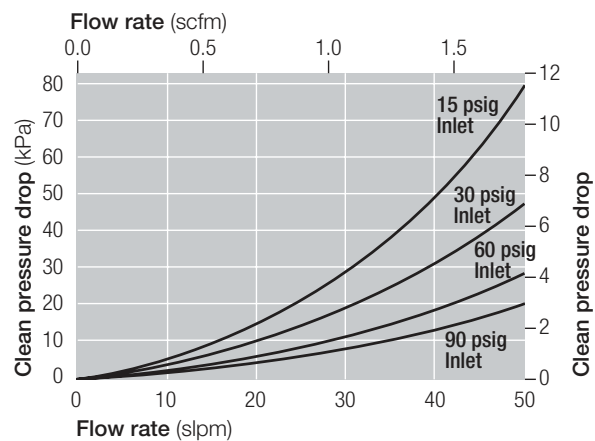

GTMF3700CC4

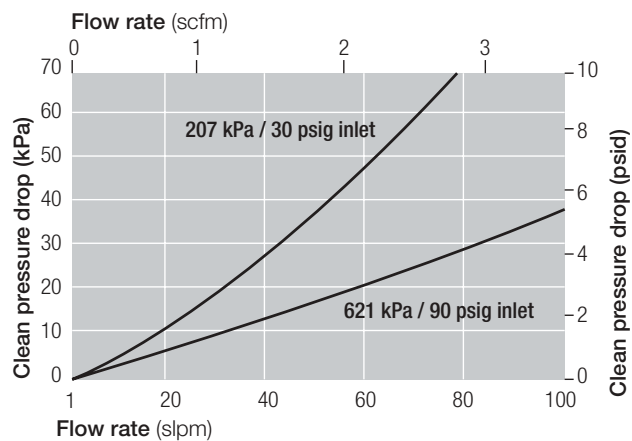

Dimensions

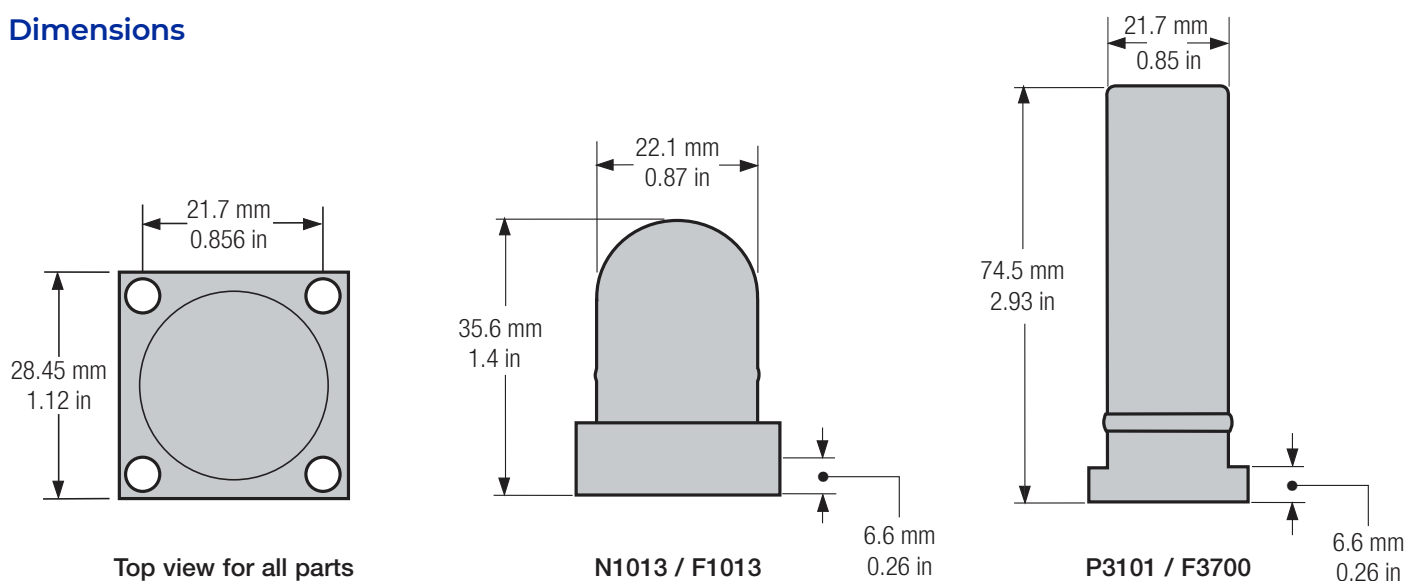

Part Numbers / Ordering Information

Part Number	Description	Nominal Height (mm / in)	Nominal Shell Diameter (mm / in)	Design Flow Rate (slpm)
GTMF1013CC4	All 316 L stainless steel	35.6 / 1.4	22.1 / 0.87	0 – 5
GTMN1013CC4	316 L stainless steel housing Nickel filter	35.6 / 1.4	22.1 / 0.87	0 – 3
GTMP3101CC4	316 L stainless steel housing All fluoropolymer element	74.5 / 2.93	21.7 / 0.85	0 – 75
GTMF3700CC4	All 316 L stainless steel	74.5 / 2.93	21.7 / 0.85	0 – 100



Microelectronics

25 Harbor Park Drive
Port Washington, NY 11050
+1 516 484 3600 telephone
+1 800 360 7255 toll free US

Nihon Pall Ltd.

6-5-1, Nishishinjuku,
Shinjuku-ku
Tokyo 163-1325 Japan
+81 3 6901 5700 telephone
+81 3 5322 2109 fax

Pall Corporation has offices and plants throughout the world. To locate the Pall office or distributor nearest you, visit www.pall.com/contact.

The information provided in this literature was reviewed for accuracy at the time of publication. Product data may be subject to change without notice. For current information consult your local Pall distributor or contact Pall directly.

IF APPLICABLE Please contact Pall Corporation to verify that the product conforms to your national legislation and/or regional regulatory requirements for water and food contact use.

© Copyright 2025, Pall Corporation. Pall, , and Gaskleen are trademarks of Pall Corporation.® Indicates a trademark registered in the USA.