

Gaskleen® TM Filter Assembly

1 1/8 " W-Seal (1.5 nm)



Data Sheet MEGTMW8ENb

Description

Pall's Gaskleen Top Mount (TM) filter assemblies are designed for ≥ 1.5 nanometer filtration of semiconductor process gases. The top mount filter is well-suited for integrated gas delivery systems, providing easy access and change out.

Features & Benefits

- Electropolished 316L stainless steel housing
- State-of-the-art filter medium
- High temperature and pressure capabilities.
- Excellent gas displacement and desorption characteristics
- 100 % helium leak tested
- Manufactured and packaged in a cleanroom environment




Specifications

Filter Medium	GTMF1013F4A	316L stainless steel
	GTMN1013F4A	Nickel
	GTMF3700F4A	316L stainless steel
Internal Surface Finish	$\leq 5 \mu\text{in} / 0.13 \mu\text{m} R_a$	
Housing	316L stainless steel	
	Housing material meets or exceeds VIM / VAR specifications.	
Removal Rating	$\geq 1.5 \text{ nm}$	
Particle Removal Characteristics	GTMF1013F4A	10^9 particle reduction up to 5 slpm
	GTMN1013F4A	10^9 particle reduction up to 3 slpm
	GTMF3700F4A	10^9 particle reduction up to 100 slpm
Connections	W-seal, 1 1/8 " interface	


Leak Rating	100% helium leak tested to $10^{-9} \text{ atm cm}^3 / \text{sec}$ Design validated to $10^{-11} \text{ atm cm}^3 / \text{sec}$
Maximum Operating Pressure	3.4 MPa @ 100 °C / 500 psig @ 212 °F
Maximum Allowable Differential Pressure	0.69 MPa @ 40 °C / 100 psid @ 104 °F
EU Pressure Equipment Directive	Assemblies have been evaluated and designed using SEP per the European Union's Pressure Equipment Directive 2014 / 68 / EU and are not CE marked.

Pressure Drop vs. Gas Flow Rate


F1013

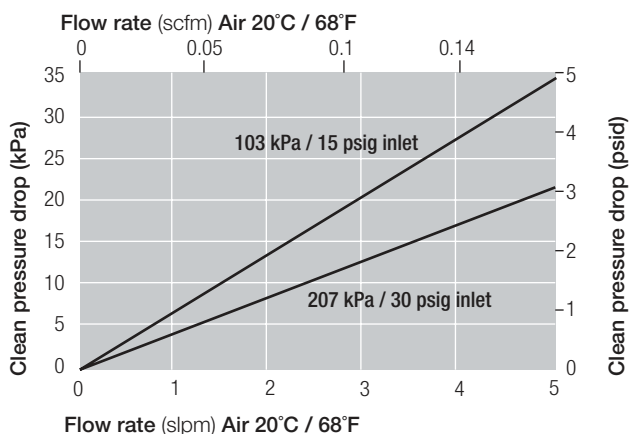

F3700

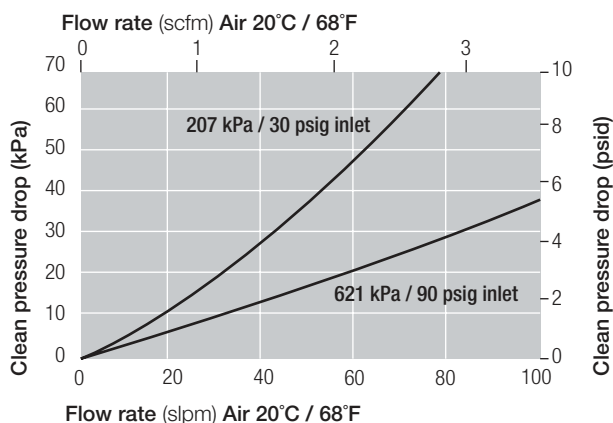

Dimensions

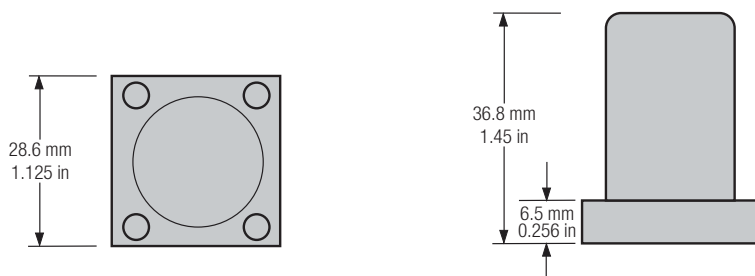

Part Numbers / Ordering Information

Part Number	Description	Height (H) (mm / in)	Design Flow Rate (slpm)
GTMF1013F4A	All 316 L stainless steel	36.8 / 1.45	0 – 5
GTMN1013F4A	316 L stainless steel housing Nickel filter	40.2 / 1.45	0 – 3
GTMF3700F4A	316 L stainless steel	79.3 / 3.12	0 – 100



Microelectronics

25 Harbor Park Drive
Port Washington, NY 11050
+1 516 484 3600 telephone
+1 800 360 7255 toll free US

Nihon Pall Ltd.

6-5-1, Nishishinjuku,
Shinjuku-ku
Tokyo 163-1325 Japan
+81 3 6901 5700 telephone
+81 3 5322 2109 fax

Pall Corporation has offices and plants throughout the world. To locate the Pall office or distributor nearest you, visit www.pall.com/contact.

The information provided in this literature was reviewed for accuracy at the time of publication. Product data may be subject to change without notice. For current information consult your local Pall distributor or contact Pall directly.

IF APPLICABLE Please contact Pall Corporation to verify that the product conforms to your national legislation and/or regional regulatory requirements for water and food contact use.

© Copyright 2025, Pall Corporation. Pall, , and Gaskleen are trademarks of Pall Corporation.® Indicates a trademark registered in the USA.