

Profile® Star Filters and DFA Capsules



Data Sheet MEPSTAENb

Description

Profile Star filters are pleated, all polypropylene depth filters ideally suited for the removal of agglomerated particles and gels from slurries used in the chemical mechanical polishing (CMP) of oxide, tungsten and copper.

Features & Benefits

- Deep, wide pleats for long service life in liquids with high levels of suspended solids
- High filter area, combined with continuously profiled pore structure minimizes shear
- Steep efficiency curves result in minimal strip-out of desirable slurry particles while sharply increasing removal of oversized particles





Specifications

Materials of Construction

Components	Materials
Filter Medium	Polypropylene
Support and Drainage	Polypropylene
Core, Cage and End Caps	Polypropylene
Housing (DFA)	Polypropylene
Gasket Options	EPDM, Polypropylene
O-ring Options	EPDM, Silicone, Fluoroelastomer

Product Name	10 inch cartridges	DFA capsules
Removal Ratings	0.8 µm, 1 µm, 1.5 µm, 3 µm, 5 µm 10 µm, 15 µm	0.8 µm, 1 µm, 1.5 µm, 3 µm, 5 µm
Maximum Operating Temperature	80 °C / 176 °F	38 °C / 100 °F
Maximum Forward Differential Pressure	0.50 MPa / 70 psid @ 50 °C / 120 °F 0.34 MPa / 50 psid @ 80 °C / 176 °F	0.34 MPa / 50 psid @ 80 °C / 176 °F
Maximum Operating Pressure	-	0.49 MPaG / 71 psig @ 38 °C / 100 °F

Typical Flow Characteristics - 1cP fluid, 20 °C

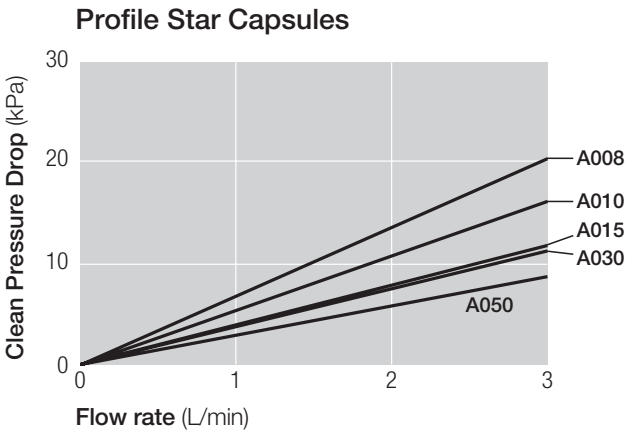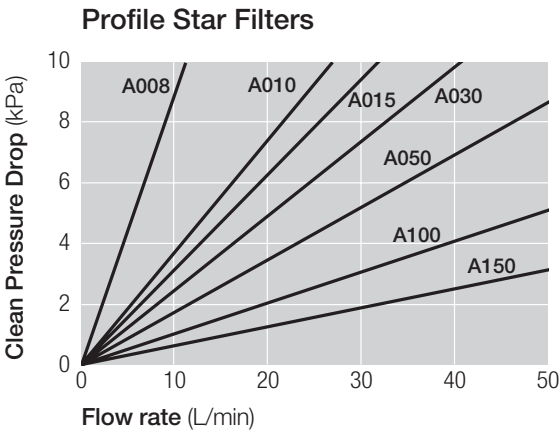

Part Numbers / Ordering Information

Gasket Seal Filters

PUY 1 A 2 3

Table 1

Code	Cartridge Length (Nominal)
1	254 mm / 10 in
2	508 mm / 20 in
3	762 mm / 30 in

Table 2

Code	Removal Ratings ¹ (µm)
008	0.8 ²
010	1 ³
015	1.5
030	3
050	5
100	10
150	15

Table 3

Code	Gasket Materials
J	EPDM (Standard)
Y1	Polypropylene

O-ring Seal Filters

AB 1 A 2 4 5

Table 4

Code	O-ring Specifications
3	AS568A-222
7	AS568A-226
25 ⁴	AS568A-222

Table 5

Code	O-ring Materials
J	EPDM (Standard)
H4	Silicone
H	Fluoroelastomer

¹ Removal ratings at 99.98 % efficiency based on a modified OSU-F2 single pass test in aqueous medium.

² Removal ratings at 94 % efficiency.

³ Removal ratings at 99.8 % efficiency.

⁴ Options for 0.8 µm only.

DFA Capsules

DFA **6** A **7**

Table 6

Code	Connections		Vent / Drain	
	Tube size	Configurations	Tube size	Configurations
4201	1/4 in	NPT male	1/8 in	NPT male
5301	6 mm	1/4" Swagelok ⁵	4 mm	Swagelok

⁵ Swagelok is a trademark of Swagelok Co.

Table 7

Code	Removal Ratings (µm)
008	0.8 ²
010	1
015	1.5
030	3
050	5

Representative example part numbers

AB1A00825J	AB1A0503J
AB2A00825J	AB2A0503J
AB1A0103J	AB1A1003J
AB2A0103J	AB2A1003J
AB1A0153J	AB1A2003J
AB2A0153J	AB2A2003J
AB1A0303J	
AB2A0303J	



Microelectronics

25 Harbor Park Drive
Port Washington, NY 11050
+1 516 484 3600 telephone
+1 800 360 7255 toll free US

Nihon Pall Ltd.

6-5-1, Nishishinjuku,
Shinjuku-ku
Tokyo 163-1325 Japan
+81 3 6901 5700 telephone
+81 3 5322 2109 fax

Pall Corporation has offices and plants throughout the world. To locate the Pall office or distributor nearest you, visit www.pall.com/contact.

The information provided in this literature was reviewed for accuracy at the time of publication. Product data may be subject to change without notice. For current information consult your local Pall distributor or contact Pall directly.

IF APPLICABLE Please contact Pall Corporation to verify that the product conforms to your national legislation and/or regional regulatory requirements for water and food contact use.

© Copyright 2025, Pall Corporation. Pall, , and Profile are trademarks of Pall Corporation. ® Indicates a trademark registered in the USA.