

UltiKleen™ STP Filter and KC Assemblies



Data Sheet MEUKSTPENc


Description

The Pall UltiKleen STP filter is specifically engineered for filtering organic stripper. In the organic stripping process, a variety of sizes and types of gels and particles are generated as a result of the various ashing processes. The ashing can change the gels to a distribution of fine particles. These fine particles can quickly clog conventional design high surface area membrane filters.

The UltiKleen STP filter is the latest advance in Pall Corporation's stripper filtration offerings. It uses a combination of carefully controlled submicron filter media. The filter is further optimized with gel-capturing, depth matrix media to effectively filter organic stripper. The proprietary media layering construction maintains high flows while removing unwanted particles and gels.

Features

- Excellent gel retention
- High flow rates
- Low extractables (< 25 ppb in a 5 % HCl extraction of 1.5 L for 24 hours)
- Downstream vent option with G2 KC assembly
- Multilayer filter media design
- All fluoropolymer construction
- 100% integrity tested
- Long service life

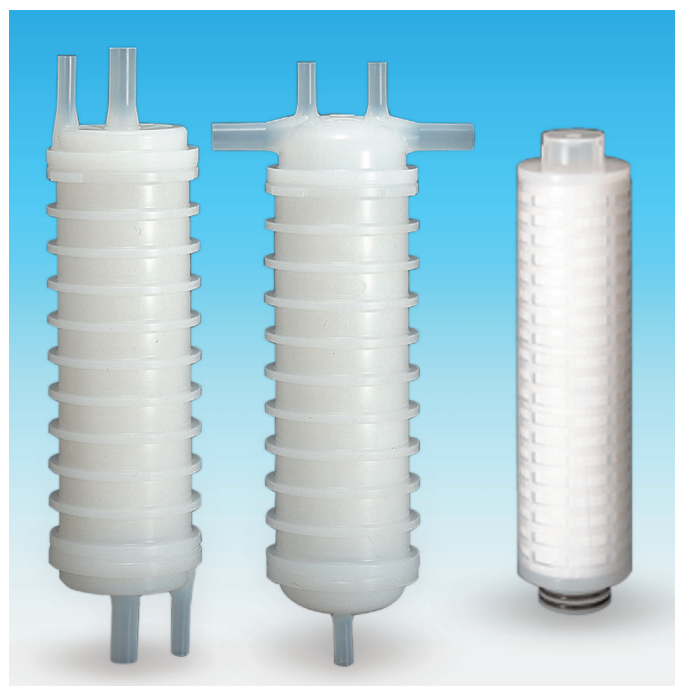

UltiKleen STP KC Assemblies

UltiKleen STP Filter

Specifications

Materials of Construction

Components	Materials
Filter Medium	PTFE
Media Support	PFA
Inner Core / Outer Cage	PFA
End Caps	PFA
O-ring (for cartridge)	FEP encapsulated fluoroelastomer
Housing (for KC type)	PFA

Removal Ratings and Operating Conditions

Removal Ratings

Configurations	Cartridge
	KC (Kleen-Change®)
Nominal Filter Area	4 inch
	10 inch
Maximum Operating Temperature	
Maximum Forward Differential Pressure (Cartridge)	

0.05 µm, 0.1 µm, 0.2 µm
102 mm / 4 inch, 254 mm / 10 inch

T flow, In-line

0.5 m² / 5.4 ft²

1.2 m² / 12.9 ft²

170 °C / 338 °F

0.6 MPaG @ 50 °C / 87 psig @ 122 °F


Maximum Operating Pressure (KC Assemblies)

0.49 MPaG < 25 °C / 71 psig < 77 °F
0.39 MPaG < 60 °C / 57 psig < 140 °F
0.34 MPaG < 90 °C / 49 psig < 194 °F
0.20 MPaG < 120 °C / 29 psig < 248 °F
0.15 MPaG < 150 °C / 22 psig < 302 °F
0.12 MPaG < 170 °C / 17 psig < 338 °F


UltiKleen™ STP Filter

Typical Flow Characteristics - 1cP fluid, 20 °C


UltiKleen ABF04 Filter

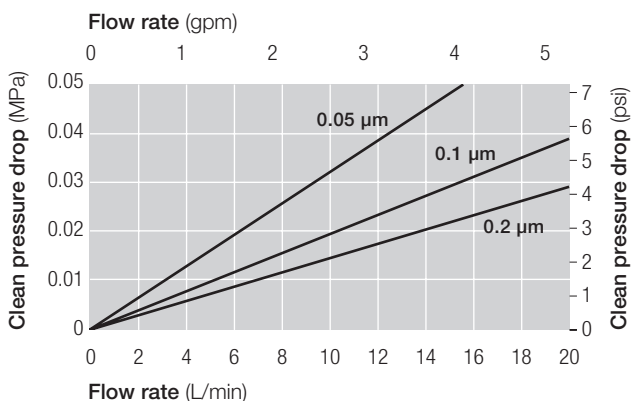

UltiKleen ABF1 Filter

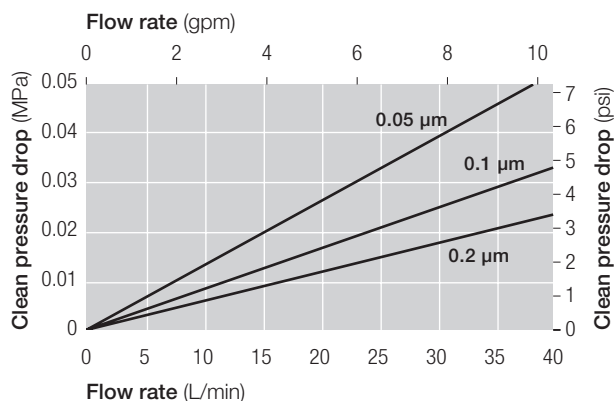

Dimensions

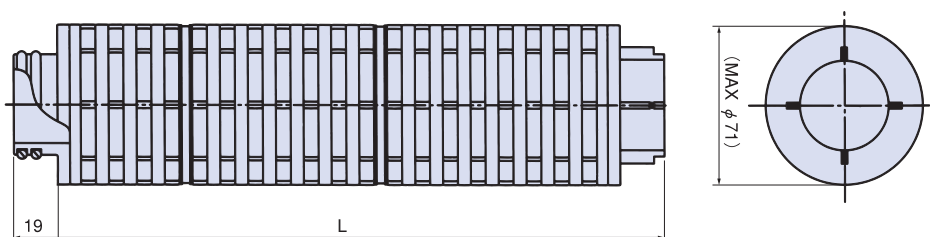

Part Numbers / Ordering Information

ABF 1 STQ 2 3E 3 4

Table 1

Code	Nominal Length	
	Inch	mm
04	4	111
1	10	265

Table 2

Code	Removal Rating
D	0.05 μm
T	0.1 μm
R	0.2 μm

Table 3

Code	O-ring options
H1	FEP encapsulated fluoroelastomer
H38	Perfrez ¹ PXC-Ultra

¹ Perfrez is a trademark of Applied Seals North Americas

Table 4


Code	Prewet option
-K3	Prewet filter (packaged in DI water)
-K7	Prewet filter (packaged in DI water), low metal extractables ²

² Please contact Pall for the extractable conditions


UltiKleen™ STP KC Assemblies

Typical Flow Characteristics - 1cP fluid, 20 °C


10 in T flow, Inlet : 3/4 inch

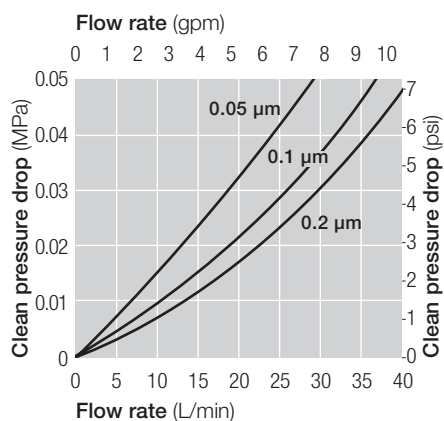


4 in In-line, Inlet : 1/2 inch

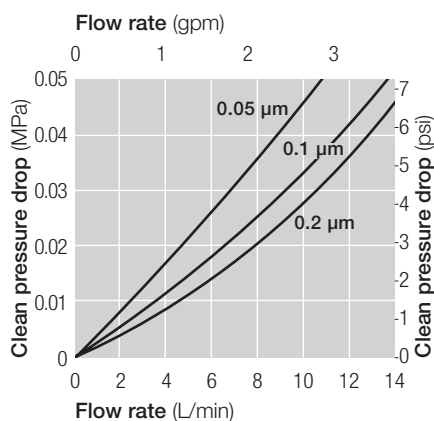

4 in T flow, Inlet : 3/4 in

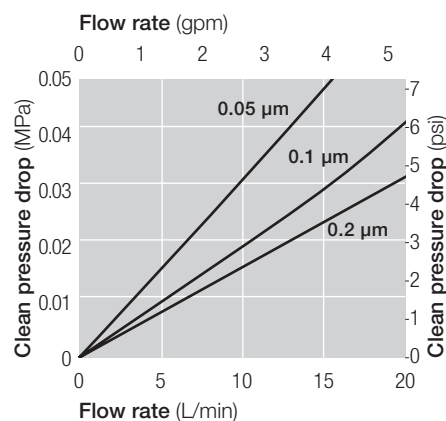

Dimensions

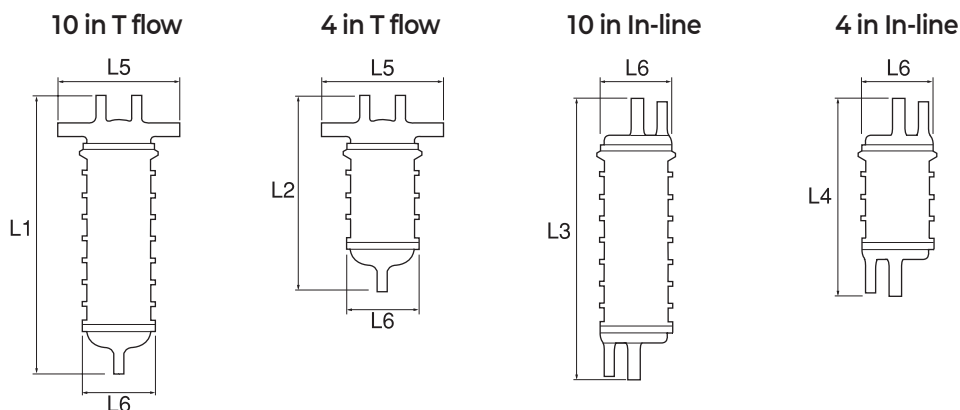

Symbols	Nominal Length L: mm / in
L1	416 mm / 16.4 in
L2	281 mm / 11.1 in
L3	430 mm / 16.9 in
L4	282 mm / 11.1 in
L5	180 mm / 7.1 in
L6	106 mm / 4.2 in

Part Numbers / Ordering Information

LDF 1 2 STQ 3 4 E 5 6

Table 1

Code	Flow
T	T flow
N	In-line

Table 2

Code	Cartridge Length
05	4 inch
1	10 inch

Table 3

Code	Removal Rating
D	0.05 µm
T	0.1 µm
R	0.2 µm

Table 4

Code	Inlet / Outlet	Vent / Drain		Memo
		Head end	Bowl end	
6	3/8" male	1/4" male	1/4" male	In-line (5 in only)
8	1/2" male	1/4" male	1/4" male	In-line
9	1/2" female	1/2" male	1/2" female	In-line
12	3/4" male	1/2" male	1/2" male	T flow
12	3/4" male	1/4" male	1/4" male	In-line
13	3/4" male	1/2" male	1/2" male	T flow / In-line

Table 5

Code	Connections
0	No connection
1	20 Series (Flowell)
2	Super Pillar Type (Nippon Pillar) ³
51	Flare style
6	FinalLock ⁴
71	Super Pillar 300 P Series (Nippon Pillar)
72	Super Pillar 300 P Series L Type (Nippon Pillar)
8	60 Series (Flowell)
9	11 CR Series (Flowell)

Table 6

Code	Prewet option
-K3	Prewet filter (packaged in DI water)
-K7	Prewet filter (packaged in DI water), Low metal extractables ⁵

³ Pillar is a trademark of Nippon Pillar Packing Co.

⁴ FinalLock is a trademark of Kurabo Industries Ltd.

⁵ Please contact Pall on the extractable conditions.

⁶ Part numbers in combination with all codes are not always available. Please contact Pall for the part number availability.



Microelectronics

25 Harbor Park Drive
Port Washington, NY 11050
+1 516 484 3600 telephone
+1 800 360 7255 toll free US

Nihon Pall Ltd.

6-5-1, Nishishinjuku,
Shinjuku-ku
Tokyo 163-1325 Japan
+81 3 6901 5700 telephone
+81 3 5322 2109 fax

Pall Corporation has offices and plants throughout the world. To locate the Pall office or distributor nearest you, visit www.pall.com/contact.

The information provided in this literature was reviewed for accuracy at the time of publication. Product data may be subject to change without notice. For current information consult your local Pall distributor or contact Pall directly.

IF APPLICABLE Please contact Pall Corporation to verify that the product conforms to your national legislation and/or regional regulatory requirements for water and food contact use.

© Copyright 2025, Pall Corporation. Pall, , and Ultikleen are trademarks of Pall Corporation. ® Indicates a trademark registered in the USA.