


ITS A CONVENTIONAL DISPOSABLE FILTER SYSTEM



THE ONLY FILTER SYSTEM THAT CHANGES WITH YOUR NEEDS.

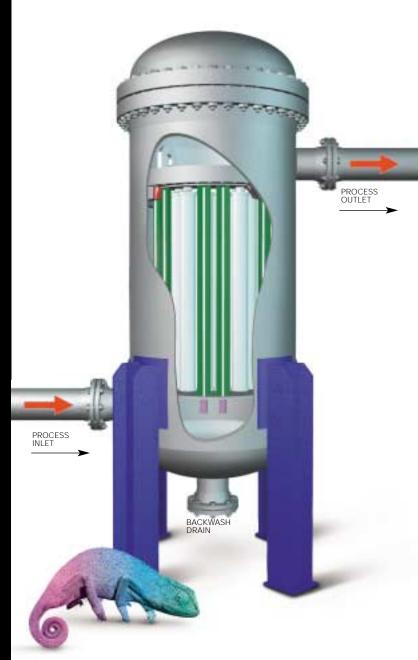

A CONVENTIONAL DISPOSABLE FILTER SYSTEM

s the world leader in filtration and A separations technology, Pall Corporation has typically offered two main filtration approaches for specific solid/liquid separation applications: disposable filter media for low solids loading and polishing, and backwash systems for high solids loading applications. Pall now offers a third option as its latest innovation, the Pall DuoFlex™ filter system. A cross between a conventional disposable filter system and a complete, fully automated backwash system, the DuoFlex filter system was designed for use with disposable filters, yet has the potential to be converted into a self-cleanable backwash filter system with only a modest additional capital investment. The DuoFlex filter system can be outfitted with the appropriate types and grades of disposable or regenerable filters that Pall makes, offering reliability and consistency typical of Pall products.

The unique DuoFlex filter system offers the broadest flexibility to the user by providing one or more housings equipped with Pall high

Use of the same vessel, regard-

less of the mode of filtration

you ultimately need, will be

possible cost.

provided to you at the lowest

performance disposable cartridges. Should the process generate more solids than originally anticipated, and consumption of disposables becomes high, the filter system can easily be converted to the self-cleaning mode. The DuoFlex filter system is custom sized to your application's needs with backwash in mind. Connections and ports are included so that such a conversion requires only the addition of valving, hardware, and automation (if desired). Therefore, you maintain utility of the vessel regardless of what your filtration requirements are today, tomorrow, and in the future. Since Pall has the widest array of continuously advancing disposable and regenerable filters, we can leverage our range of element technology to maximize your process and provide

the greatest benefit for your application.

A significant number of applications fall between a disposable or backwashable filter selection, making the DuoFlex filter system the optimum choice. With the DuoFlex filter system approach, the disposable element configuration of the housing is ready for conversion, as the vessel has already been designed and outfitted for a potential future backwash system upgrade.

THE PALL DUOFLE CONVERTS FROM A SYSTEM TO A BACKW MINIMUM AMOUNT OF

Pall Disposable Filter Selection



Profile® II Filters
Profile II filters are constructed of a polymeric continuously tapered depth-type medium that combines an upstream section and a downstream absolute



Utipleat™ Profile® Filters
The unique crescent-shaped construction of the Ultipleat Profile filter element provides longer life than many pleated polypropylene media. It is optimized for the removal of gels and various fluids.



Epocel® Filters
Epocel cartridges have a pleated, high area, fixed pore construction which eliminates unloading and media migration. Epocel cartridges provide long service life and consistent production.



HDC*II Filters
The HDC II medium consists of multiple layers of continuous fiber, nonwore polypropylene pleated together, with no binders or extraneous material.



Pall Non-metallic **Backwash Filter** Selection



Prosep® Filters

Prosep filters are manufactured of polyolefin or polyaramid fiber to provide outstanding temperature and chemical compatibility. Prosep filters have a tapered-pore construction, designed for use with or without a



Septra™ Filters

Septra filters incorporate a pleated, high-area absolute-rated polymeric medium in a rugged element construction designed for operation (without use of a precoat) in auto mated, clean-in-place fluid/solid separation systems. The high-area filter medium is available with polyolefin. polvaramid, or fiberglass fibers to suit operation up to 500°F (260°C).

A COMPLETE FULLY AUTOMATED BACKWASH SYSTEM

Many applications for which the DuoFlex filter system is an excellent choice include petroleum refining, chemical and petrochemical production, and various types of water systems such as power plants and municipal water. Pall recognized the major role filtration plays in these industries in order to improve system run times, and responded with the DuoFlex filter system design. The DuoFlex filter system is built completely to Pall ASME quality standards, and will meet any specific construction requirements provided to our design team. It is designed to use Pall HDC II, Profile II, Epocel, and Ultipleat Profile disposable cartridges, and Prosep and Septra backwashable filter elements.

All of Pall's state-of-the-art worldwide manufacturing facilities adhere to uniform manufacturing procedures and have been granted International Standards Organization (ISO) certification to ISO 9001. This ensures that Pall filtration products will perform exactly as specified, no matter where in the world they are installed. We look forward to applying our principles, technology and experience to help you achieve a higher level of process control and efficiency in your operations.

Benefits

- future operates with any of Pall's disposable or self-cleanable filters.
- backwashable system.
- Insurance of complete turn-key package built to design specifications.
- Upgraded filter system is possible without having to remove existing equipment.
- Same high quality in an alternative package design at a lower cost, with option to upgrade.
- tube sheet bundle.
- to collect.
- flow dynamics.

- Disposable filter cartridge consumption may become less economical.
- Plugged filter cartridges and excessive cartridge use results in unacceptable process downtime.
- High changeout frequency results in unacceptably high labor costs and manpower exposure issues.
- Filter cartridge disposal costs are high.

- Complete operational flexibility for the
- Low initial capital cost, with minimal added expense for upgrade to complete

- Ease of service/design allows for quick individual element changeout or removal of
- Clean housing design no area for solids
- Low pressure drop due to good housing

DuoFlex filter system is the optimum choice

- Process is subject to frequent upsets.
- Filtration/process requirements may change in the future.

Pall CorporationIPG Marketing Department/DuoFlex 2200 Northern Boulevard East Hills NY 11548-9835 BUSINESS






BUSINES S

Pall CorporationIPG Marketing Department/DuoFlex 2200 Northern Boulevard East Hills NY 11548-9835

RE PLY






needs.DuoFlex Filter Systems. Pall DuoFlex" Filter System— The only filter system that ch

THE OILLY LINET SYSTEM WAT CHANGES WITH YOUR IN
Please complete this card and mail it to receive more information on Du-
Yes! I would like the following:
☐ Send me information on opportunities to utilize DuoFlex filter syster
\square I'd like to set up a technical consultation.
\square Please have a salesperson call me.
My application is (please provide description):

Sent the inormation of opportunities to unize Duoriex filters	☐ I'd like to set up a technical consultation.	☐ Please have a salesperson call me.	My application is (please provide description):	

Pall Duo Flex Filter System— The only filter system that changes with your needs. Please complete this card and mail it to receive more information on DuoFlex Filter Systems.	nges with your needs. more information on DuoFlex Filter Systems.		Pall DuoFlex" Filter System— The only filter system that changes with your needs. Please complete this card and mail it to receive more information on DuoFlex Filter System.	iges with your needs. more information on DuoFlex Filter Syste
Yes! I would like the following: Send me information on opportunities to utilize DuoFlex filter systems in my plant. I'd like to set up a technical consultation.	tilize DuoFlex filter systems in my plant.		Yes! I would like the following: Send me information on opportunities to utilize DuoFlex filter systems in my plant. I'd like to set up a technical consultation.	llize DuoFlex filter systems in my plant.
 ☐ Please have a salesperson call me. My application is (please provide description): 			☐ Please have a salesperson call me. My application is (please provide description):	
Name:	Title:		Name:	Tritle:
Company:			Company:	
Address:			Address:	
City:	State: Zip:		City:	State: Zip:
Telephone: ()	Best time to reach me is:(A	(AM/PM)	Telephone: (Best time to reach me is:
Fax:	E-mail address:		Fax:	E-mail address:
☐ Please add my name to the Pall mailing list.			☐ Please add my name to the Pall mailing list.	
Thank you	Thank you for completing this card.		Thank you	Thank you for completing this card.

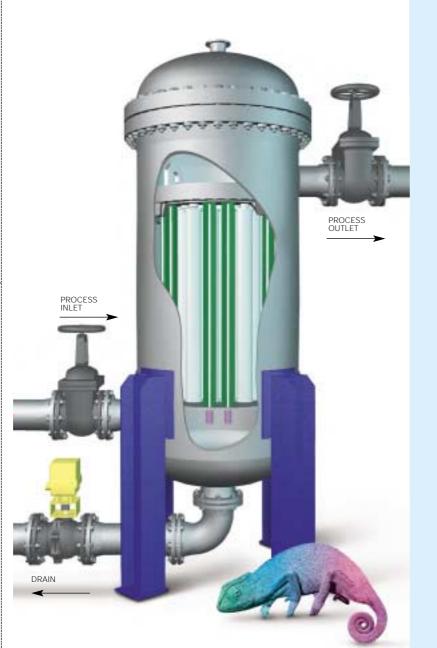



Filtration.

Separation.

Solution.™

Pall Corporation

2200 Northern Boulevard East Hills, New York 11548-1289 516-484-5400 • 1-800-645-6532 Fax: 516-484-0364 http://www.pall.com



International Offices and Plants:

Pall Australia, Cheltenham 3192

Austria: Pall Filter Ges.m.b.H., Vienna A-1170

Canada: Pall (Canada) Ltd., Mississauga, Ontario L5N 3R3

China: Pall Filter (Beijing) Co. Ltd., Beijing 100020

England: Pall Europe Ltd., Portsmouth PO1 3PD

Pall France S.A., Paris 78104

Germany: Pall GmbH, Frankfurt D-63303

Hong Kong: Pall Asia International Ltd., Wanchai

Italy: Pall Italia, s.r.l., Milan 20146

Japan: Nihon Pall, Ltd., Tokyo 141

South Korea: Pall Korea Ltd., Seoul 135-280

Poland: Pall Poland, Ltd., Warsaw 01949

Russia: Pall Moscow, 121500

Singapore: Pall Filtration PTE., Ltd., Singapore 1334

Spain: Pall España s.a., Madrid 28100 **Switzerland**: Pall (Schweiz) AG, Muttenz CH-4132

Pall Filtration PTE, Ltd., Taipei 10580

USA: Pall Corporation, East Hills, New York 11548.

Distributors in all major industrial areas of the world.

Distributed by:

