



## P Emflon® Filter



### Description

The P Emflon filter is specifically recommended for bulk filtration of photoresists and chemicals that are compatible with PTFE and high density polyethylene (HDPE). In addition, it utilizes the latest advance in Pall filtration technology: the crescent shaped Ultipleat® filter configuration.

- Wide range of configurations
- High flow rates
- Integrity testable
- Low extractables
- Optimized design
- Manufactured in a cleanroom environment
- 100% integrity tested

### Specifications

#### Materials

- Medium: PTFE
- Core, cage, and end caps: High density polyethylene (HDPE)
- Support and drainage: High density polyethylene (HDPE)
- O-ring options: Viton<sup>1</sup> and Teflon<sup>1</sup> encapsulated Viton

#### Removal Ratings

- 10 µm, 5 µm, 0.2 µm, 0.1 µm, 0.05 µm

#### Filter Areas

- 254 mm / 10 in: 1.07 m<sup>2</sup> / 11.5 ft<sup>2</sup>

#### Configurations

- Nominal length: 229 mm / 9 in, 254 mm / 10 in, 508 mm / 20 in, 762 mm / 30 in and 1016 mm / 40 in
- Diameter: 70 mm / 2.75 in
- O-ring size / end caps:
  - Code 3: 222 double O-ring / flat end
  - Code 8: 222 double O-ring / finned end
  - Code 7: 226 double O-ring / bayonet lock / finned end
  - MR Code 3: 222 double O-ring / flat end designed to retrofit Code 0 elements

#### Operating Conditions

- Maximum temperature: 70°C / 158°F
- Maximum forward/reverse differential pressure: 0.41 MPa @ 70°C / 60 psid @ 158°F

#### Integrity Test Values<sup>2</sup>


Per 254 mm / 10 in segment

- 0.05µm: < 50 mL / min @ 0.12 MPa / 17.5 psig
- 0.1 µm: < 20 mL / min @ 0.1 MPa / 15 psig

<sup>1</sup> Viton and Teflon are trademarks of E.I. du Pont de Nemours and Company.

<sup>2</sup> Test fluid used is 60:40, IPA:H<sub>2</sub>O.

## Pressure Drop vs. Liquid Flow Rate<sup>3</sup>

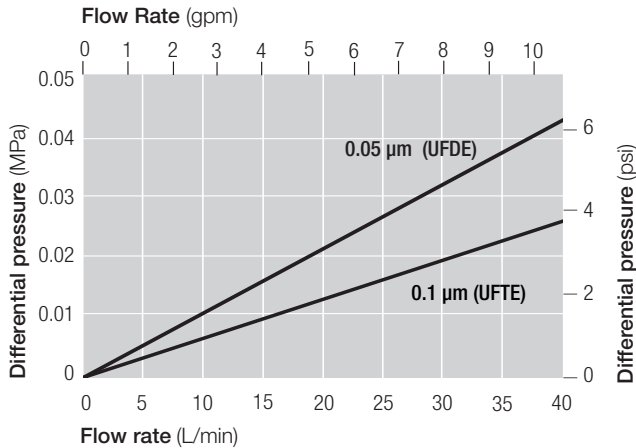

<sup>3</sup> For liquids with a viscosity differing from water, multiply the pressure drop by the viscosity in centipoise.

## Part Numbers / Ordering Information

Part Number <sup>4</sup>	Removal Rating (µm)	Nominal Length (mm / in)	Configuration Code	O-Ring Material <sup>5</sup>
ABD1UFE3EJ	10	254 / 10	3	Ethylene propylene
ABD1UFC3EJ	5.0	254 / 10	3	Ethylene propylene
ABD1UFR3EH1	0.2	254 / 10	3	Teflon encapsulated Viton
MRD1UFR3EH1	0.2	229 / 9	3	Teflon encapsulated Viton
MRD1UFT3EH1	0.1	229 / 9	3	Teflon encapsulated Viton
ABD1UFT3EH1	0.1	254 / 10	3	Teflon encapsulated Viton
ABD1UFT7EH1	0.1	254 / 10	7	Teflon encapsulated Viton
ABD1UFT8EH1	0.1	254 / 10	8	Teflon encapsulated Viton
ABD1UFD3EH1	0.05	254 / 10	3	Teflon encapsulated Viton
ABD1UFD7EH1	0.05	254 / 10	7	Teflon encapsulated Viton
ABD1UFD8EH1	0.05	254 / 10	8	Teflon encapsulated Viton
MRD1UFD3EH1	0.05	229 / 9	3	Teflon encapsulated Viton

<sup>4</sup> The above filter configurations are also available in 508 mm / 20 in, 762 mm / 30 in, and 1016 mm / 40 in lengths. These can be ordered by changing the fourth digit in the part number to a 2, 3 or 4 respectively.

<sup>5</sup> Other O-ring materials are available.



## Microelectronics

25 Harbor Park Drive  
Port Washington, New York 11050

1.800.360.7255 toll free (only in US)  
1.516.484.3600 phone  
1.516.625.3610 fax  
microelectronics@pall.com

*Filtration. Separation. Solution.<sup>SM</sup>*

Visit us on the Web at [www.pall.com/micro](http://www.pall.com/micro)

Pall Corporation has offices and plants throughout the world.

© Copyright 2008, Pall Corporation. Pall, Emflon, and Ultraplex are trademarks of Pall Corporation.  
® Indicates a Pall trademark registered in the USA. *Filtration. Separation. Solution.<sup>SM</sup>* is a service mark of Pall Corporation.

E40b-m

1/08