
POMF 1A POMF 2A POMF 10A POMF 25A POMF 90A POMF 0A



POLYMICRO*
MICROFIBER
FILTER BAG

MICROFIBER OFFERS PRODUCT CLEANLINESS, HIGH THROUGH-PUT AND SERVICE LIFE.





POLYMICRO® MICROFIBER FILTER BAG

FEATURES	BENEFITS
Extractible Free Fibers	Non-Foaming. Ideal For Food, Beverage, Water, Chemicals and Coatings.
80% + Void Volume Lightweight	Long Service Life High Contaminant Loading Reduced Waste Loads.
Hydrophobic Surface	Will Absorb Oil From Air, Gas & Aqueous Streams.
Compacts To Small Volume Or Incinerable	Reduces Disposal Cost
Dimensionally Stable Media	Consistent Performance
Polypropylene	Broad Range Of Chemical Resistance.

STANDARD BAG SIZE	COLLAR	OPTIMUM FLOW RATES
#1 7"×16"	POLYLOC	65 GPM
#2 7"×32"	OR	125 GPM
#3 4"×9"	STEEL SNAP RING	20 GPM
#4 4"×14"		35 GPM

Differential Pressure: 35 PSIG Maximum

10-15 PSIG Recommended Change-Out

1-3 PSIG Initial

Operating Temperatures: Maximum Continuous – 200°F


MICRON RATINGS

1	25
2	90
10	OA – Special purpose 25 micron

MATERIAL

Polypropylene

POLYLOC* SNAP-FIT POSITIVE SEAL

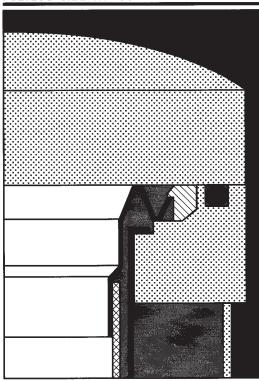

Hermetic seal of filter bag within housing to prevent liquid bypass.

TO LEARN MORE ABOUT FILTER SPECIALISTS, INC. PRODUCTS, CONTACT OUR OFFICE BELOW OR VISIT OUR WEB PAGE: http://www.fsifilters.com.



100 Anchor Road P.O. Box 735 Michigan City, IN 46361 219/879-3307 219/877-0632 Fax

800-348-3205

There are no expressed or implied warranties, including the implied warranty of merchantability and fitness for a particular purpose not specific herein respecting this agreement or the product being sold hereunder or the service provided herein.



